





TECHNICAL DATA SHEET

Aluminum siding accessories MAE Series

J-Trim (1 in)

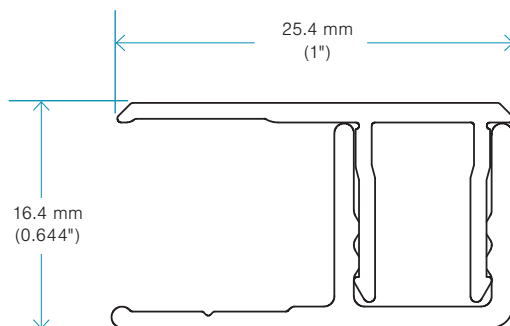

▶ TOP AND BASE
PROFILES SOLD
SEPARATELY

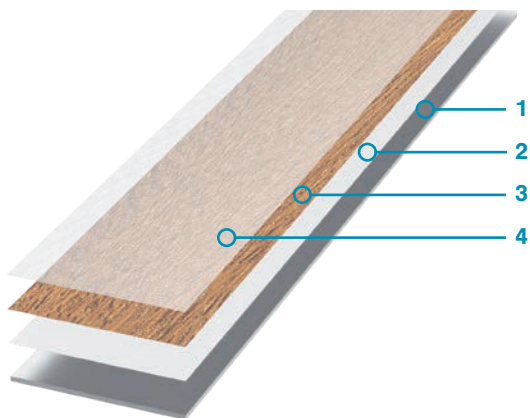

Printed Finish

1. ALUMINUM

6063-T5 Aluminum extrusion 0.055" (1.40 mm) thick, recognized as the industry's first choice for its exceptional durability.

The two-piece accessory moldings are joined together using a snap system, allowing installation without exposed screws.

Installation can be done horizontally and vertically.

2. PRIMER COAT

Specially formulated primer coat ± 1.2 mils (30.48 μm) thick assures optimal adhesion between aluminum and ink.

3. HD PRINTING

High-definition digital inkjet print ± 1 mil (25.4 μm) thick of a wide range of textures with outstanding color variations.

4. CLEAR COAT

A protective clear coat ± 1.2 mils (30.48 μm) thick is applied to provide long-term protection against fading.

General Specifications

MODELS

- AEMJT1IMP - Printed finish top
- AEMJB1IMP - Printed finish base
- AEMJT1TEI - Solid color top
- AEMJB1TEI - Solid color base

LENGTH

12 ft | 3.56 m

PRODUCT

J-trim (1 in), siding accessories

AVAILABLE FINISHES

- Printed finish
- Solid color

MATERIAL

6063-T5 aluminum

WEIGHT

- Top only: 1.93 kg | 4.25 lbs
- Total (Top & Base): 2.83 kg | 6.25 lbs

TESTS AND CERTIFICATIONS*

- CAN/ULC S102 - Fire Resistance
- CAN/ULC S114 - Fire Resistance
- ASTM E84 - Fire Resistance
- NFPA 285 - Fire Resistance
- ISO 7895 - Impact Resistance
- ASTM D3359 - Adhesion testing
- ASTM D6578 - Graffiti Resistance
- ASTM G155 - UV Resistance
- ISO 7895 / ASTM E330 - Wind Load
- Florida Building Code (FBC) compliance